

CYBEART

JOIN THE REVOLUTION


AKULA 99 LITE



99 KEYS WITH VOLUME KNOB

USER MANUAL

Keyboard Function Description

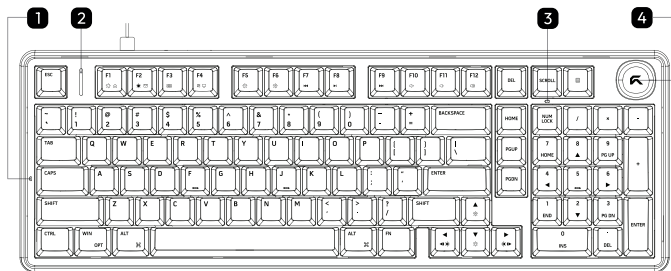

1 CAP capitalization indicator light

2 RGB atmosphere light bar/ battery indicator light

3 Num indicator light

4 Knob mode key (office/game)

- This keyboard features a sleek and modern exterior design, 99-key layout with a knob and a gasket-mounted structure, PCB single key slotting, Premium and soft touch
- The keycaps and mechanical switches are hot-swappable, allowing users to freely customize their setup with various switch brands and personalized keycaps available on the market.
- Wired Mechanical Keyboard
- Equipped with a Fn key the keyboard provides with a series of commonly used shortcut functions.
- Keyboard Return rate : Wired mode - 125Hz
- Wired mode support full key rollover with no input lag

Backlight Effect Adjustment



FN+\\Key combination to switch 20 light effects

Backlight effect shortcut key adjustment



I \\	Light mode switching
▲ ※	Increased brightness of lighting




▼ ※	Reduced brightness of lighting
◀ ※	Reduced light effect speed
▶ ※	Light effect speed increases

Atmosphere light strip adjustment




SHIFT - R	Switch RGB ambient light bar mode
.>	Switching RGB ambient light bar speed
ALT - R	RGB ambient light bar brightness cycle

Dual Mode Switching




Long press the mode key to switch between game/office modes, and the CAP and WIN key lights will flash when switching.

- Game mode (switch to game mode with CAP and WIN keys flashing white light)



**Short press the mode key to cycle through
16 RGB lighting effects**
Knob clockwise (Light brightness+)
Knob counterclockwise (Light brightness-)

- Office mode (switch to game mode with CAP and WIN keys flashing white light)



Short press mode key=multimedia function (mute)
Knob clockwise=multimedia function (Volume+)
Knob counterclockwise=multimedia function (Volume-)

Shortcut Key Description

FN+	ESC	Long press for 3 seconds to restore factory settings	FN+	DEL	INS
	WIN	Lock WIN key, WIN key cannot be used when locked		SCROLL	PRTSC
	HOME	END		CALCULATOR	PAUSE

Turn top left side switch to Android

Key position	Single press	Fn combination
F1	Screen brightness -	F1
F2	Screen brightness +	F2
F3	Convert window	F3
F4	Return to desktop	F4
F5	Light brightness -	F5
F6	Light brightness +	F6

Key position	Single press	Fn combination
F7	Previous song	F7
F8	Play/pause	F8
F9	Next song	F9
F10	Mute	F10
F11	Volume -	F11
F12	Volume +	F12

Turn top left side switch to WIN

Key position	Single press	Fn combination
F1	F1	Homepage
F2	F2	Mail
F3	F3	Convert Window
F4	F4	Open Resource Manager
F5	F5	Light brightness -
F6	F6	Light brightness +

Key position	Single press	Fn combination
F7	F7	Previous song
F8	F8	Play/pause
F9	F9	Next song
F10	F10	Mute
F11	F11	Volume -
F12	F12	Volume +


Turn top left side switch to MAC

Key position	Single press	Fn combination
F1	Screen brightness -	F1
F2	Screen brightness +	F2
F3	Convert window	F3
F4	Return to desktop	F4
F5	Light brightness -	F5
F6	Light brightness +	F6

Key position	Single press	Fn combination
F7	Previous song	F7
F8	Play/pause	F8
F9	Next song	F9
F10	Mute	F10
F11	Volume -	F11
F12	Volume +	F12

Product Parameters

- Number of keys: 99
- Total stroke of buttons: 4.0mm
- FN key multifunctional
- Product size: 406.76x133.31x43.28z±0.1mm
- Product weight: approximately 1084g (including cable)
- Rated Voltage/current: DC5V≤250mA





cybeart.com